

High Performance, Professional Licence Free Radio

Outstanding audio quality, high performance and strong commercial build make the IC-F27SR the ideal licence free radio. This licence free radio is ideal for users in diverse areas such as construction, catering, event management, shopping centres, factories, farms as well as serious outdoor enthusiasts.

Up to 35.5 hours of operating time

The IC-F27SR features highly efficient circuitry, providing up to a massive 35.5 hours of operating time* with the supplied BP-265 2000mAh lithium-ion battery pack. This means it can be comfortably last an entire shift.

* Tx: Rx: Stand-by =5: 5: 90 with power save ON.



Outstanding audio quality

800mW audio output is provided from the large 45mm speaker meaning the IC-F27SR can deliver loud and intelligible audio even in extremely noisy environments such as a busy shop floor or construction site.



Just three main controls

Transmit button, volume control and channel selector. This simple to use radio is ideal for high turnover environments and shift work where the radio is constantly passed from person to person.

Lightweight, Compact Body

Small size (58x186x36.5mm) and lightweight (285g) makes this transceiver ideal for all users.

Commercial grade construction

The IC-F27SR is extremely rugged. It has been tested to 11 categories of environmental military standards for dust protection and water resistance making it ideally suited for outdoor use.

Internal VOX for Hands-free operation

Built-in VOX function provides convenient hands-free operation, when used with our optional headset adapter cable.

500mW output power

Provides a wide communication coverage.




OTHER FEATURES

- CTCSS and DTCS encoder and decoder for group call
- Surveillance function turns off the LED and beep sound
- Siren function can be used for security alarm
- Power save function
- Low battery Alert
- Time out timer
- Monitor function

SPECIFICATIONS

Frequency coverage	446.00625–446.09375MHz 8 PMR 446 allocated channels
Channel spacing	12.5kHz (8K50F3E)
Current drain (approx.)	
TX	400mA
RX Max. audio	330mA (Internal SP)
Operating temperature range	–25°C to +55°C (Radio only)
Frequency stability	±2.5ppm
Output power (at 7.2V DC)	500mW (ERP)
Ext. microphone connector	3-conductor 2.5 (d) mm/2.2kΩ
Sensitivity (at 20dB SINAD)	26.5dBμV/m emf (at 5% distortion)
Audio output power	
Internal speaker	800mW typ. (With 12Ω load)
External speaker	400mW typ. (With 8Ω load)
Ext. speaker connector	2-conductor 3.5 (d) mm/8Ω

DIMENSIONS & WEIGHT

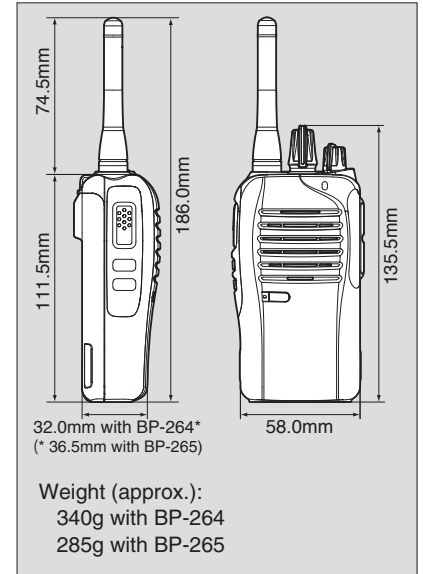

SUPPLIED ACCESSORIES

- Li-ion battery pack versions
- Li-ion battery pack, BP-265
 - Belt clip, MB-124
 - Battery charger, BC-193
 - AC adapter, BC-123SE*

- Ni-MH battery pack versions
- Ni-MH battery pack, BP-264
 - Belt clip, MB-124
 - Battery charger, BC-192
 - AC adapter, BC-206SE*

* AC adapter is not supplied or may differ depending on version.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip	506.4	I, III
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard

Dust & Water | IP54 (Dust-protection and water resistant)

Measurements made in accordance with EN 300-296. All stated specifications are subject to change without notice or obligation.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BP-263
LR6 (AA)
batteries x 6

BP-264
Ni-MH, 7.2V
1400mAh

BP-265
Li-ion, 7.4V
1900mAh (min.)
2000mAh (typ.)

REGULAR CHARGER
For BP-264 (Ni-MH battery)

BC-206SE **BC-192**

Charges the BP-264 in 16 hours (approx.).

RAPID CHARGER
For BP-264 (Ni-MH battery)

BC-123SE **BC-191**

Charges the BP-264 in 2 hours (approx.).

RAPID CHARGER
For BP-265 (Li-ion battery)

BC-123SE **BC-193**

Charges the BP-265 in 2.5 hours (approx.).

MULTI-CHARGER
For BP-264/BP-265

BC-197

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLES

CP-23L
For use with BC-191 or BC-193

OPC-515L
For use with BC-191, BC-192 or BC-193

OPC-656
For use with BC-197

HEADSETS and PLUG ADAPTER CABLE

HS-94 Earhook type

HS-95 Behind-the-head type

HS-97 Throat type

OPC-2004 Required when using any of these headsets

SPEAKER-MICROPHONES

HM-158LA **HM-159LA**

EARPHONE
• SP-27 Tube Earphone

BELT CLIP
• MB-124 Alligator type belt clip. Same as supplied.

VEHICLE CHARGER BRACKET
• MB-130 For use with BC-191, BC-192 or BC-193.

CHARGER ADAPTERS
• AD-120 for BP-264 • AD-121 for BP-265
Either AD-120 or AD-121 charger adapters are supplied with the BC-197, depending on BC-197's version.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world **Count on us!**

Icom America Inc.
2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom New Zealand
146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Icom (UK) Ltd.
Blacksale House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Icom Canada
Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom (Europe) GmbH
Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Beijing Icom Ltd.
10C07, Long Silver Mansion, No.88,
Yong Ding Road, Haidian District,
Beijing, 100039, China
Phone: +86 (010) 5889 5391/5392/5393
Fax: +86 (010) 5889 5395
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3169 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska
81-850 Sopot, ul. 3 Maja 54, Poland
Phone: +48 (58) 550 7135
Fax: +48 (58) 551 0484
E-mail: icompolska@icompolska.com.pl
URL: <http://www.icompolska.com.pl>

Your local distributor/dealer: