

2 East Main Street
 Carpentersville, IL 60110
 Phone: 847-428-7171
 Toll Free Phone:
 888-234-OTTO (6886)
 Fax: 847-428-1956




For warranty information, customer service or replacement parts, please contact:

Information on Disposal of Old Electrical and Electronic Equipment (applicable for EU countries that have adopted separate waste collection systems)

Products with the symbol (crossed-out wheeled bin) cannot be disposed as household waste.

Old electrical and electronic equipment should be recycled at a facility capable of handling these items and their waste byproducts. Contact your local authority for details in locating a recycle facility nearest to you.

Proper recycling and waste disposal will help conserve resources whilst preventing detrimental effects on our health and the environment.



Description	Part Number
Foam Earphone Covers (5)	C807098-05
Foam Microphone Windscreen (5)	C807097-05



Replacement Parts

Operation:

Turn the radio on and operate it as explained in the operating instructions supplied with the radio. Installing the headset (1) bypasses the radio's speaker and routes the output to the headset's speaker, and (2) disables the radio's microphone and enables the boom microphone.

Microphone position is adjusted by rotating and bending the boom arm to place the microphone within one half inch or less of the mouth.

Microphone is activated by radio push-to-talk unless the headset is supplied with and in-line push-to-talk.

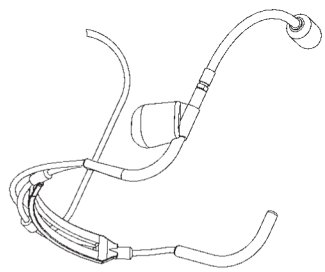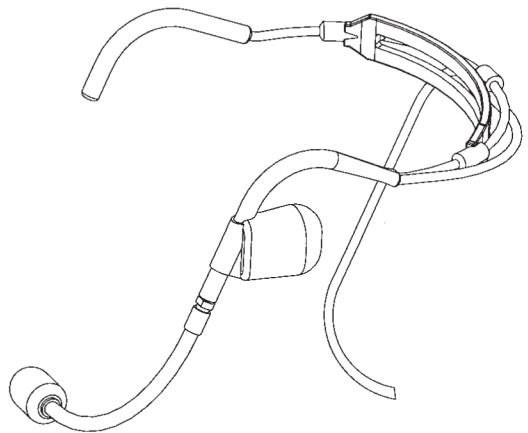

- flexible boom with bi-directional, noise cancelling microphone
- adjustable headband
- microphone windscreen

These headsets feature:

The OTTO Ranger Headset for Two-Way-Radio communications is intended for use in areas with moderate background noise to provide privacy and noise isolation.

OTTO Ranger Headset



Installation:

- (1) Turn the radio off.

Note: Installation of the headset while the radio is on may cause the radio to transmit constantly, locking up your radio system. If this should happen, turn off the radio. The radio can then be turned back on, restoring normal operations.

- (2) As required, remove any dust caps or covers from the radio accessory connector and install appropriate adapters.
- (3) Attach headset to the radio accessory connector. Tighten mounting thumbscrew if required.
- (4) If applicable, install appropriate accessory clamp.