

The TITAN Firecom HUC5

Single and stereo for Fire and Rescue

THE TITAN FIRECOM

Should be a permanent item for your fire and rescue communication, Its used for F1SF and F2 helmets.

This comprehensive communication device can be directly connected to a speaker microphone or a PTT using the nexus connection.

It comes in a stereo, single and listen only version for your helmet and critical communication needs.



Part number:
HUC5 -ST-TP-C
HUC5 -ST-TP-S

Technical data

Loudspeaker specifications		Cable	
Normal size	40mm, 1,5 inch.	Cable lenght	55cm
Resonant frequency	530 Hz \pm 150 Hz at 1 V	Type	straight or coiled flame retardant ULV.0
Impedance	8 Ohm \pm 15% at 1 KHz 1 V	Connector	Nexus TP120 connector
Sound pressure level	90 dB/w \pm 3 dB 0.5 w 50 cm ave at 0.8K, 1K, 1.2K, 1.5K Hz	Microphone	
Response	Fo Hz \sim 6 KHz max 10 dB	Generating element	Electret condenser
Input power	Nominal 0.5 W - Handling capacity 1.0 W	Polar response	Noisecanceling at 1KHz - Waterproof
		Sensitivity	-33 to -25dB ref 1 Vms (1KHz and 1PA at 1/4)

The TITAN Firecomm HUC5

Single and stereo for Fire and Rescue




Part number:
HUL5 -ST-TP-C
HUL5 -ST-TP-S



Part number:
HUL5 -L-TP-C
HUL5 -L-TP-S
HUL5-R-TP-C
HUL5-R-TP-S



Part number:
HUC5 -R-TP-C
HUC5 -L-TP-C

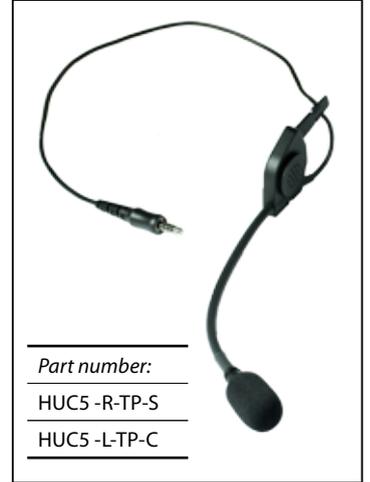

Part number:
HUC5 -R-TP-S
HUC5 -L-TP-C

Listen only version

Single with coiled and straight cable version



Nexus TP120 connector
to be used for PTT's and
speaker microphones.



Loudspeakers with a clip
that fits F1SF and
F2 helmets.

